

**Weather Proof  
(NEMA 4 and 13)**

### DESCRIPTION

Versatile Nega-Rate® Belleville disc spring pressure switch for a wide range of applications. Series 200P (piston sensor) for hydraulic applications up to 10000 psig system pressure.

### Operating Pressure Data

Adjustable Range Number	Adjustable Set Point Range		Deadband† (approximate)		Maximum Recommended System Pressure	Proof Pressure
	Increasing	Decreasing	Min.	Max.		
2	20 to 220	14 to 202	6	18	3000	4500
3	200 to 1500	150 to 1275	50	225	7500	10000
6	500 to 3000	375 to 2700	125	300	7500	10000
8	1000 to 10000	800 to 9000	200	1000	10000*	15000**

All values given in psig.

†The deadband increases as the adjustable set point is increased.

\*Diminished safety factor equal to approximately 2:1.

\*\*Diminished safety factor equal to approximately 1.3:1.

### Standard Specifications

#### Electrical

Snap action electrical switch recognized by Underwriters' Laboratories, Inc. and CSA International

#### Electrical Connection

½ NPT female conduit connection with terminal block

#### Pressure Connection

Wetted Material 1  
¼ NPT Female

#### Temperature Range\*

Ambient: -40°F to +180°F  
(-40°C to +82°C)

Media: -40°F to +300°F  
(-40°C to +149°C)

\*Temperature limits change with O-Ring selection

#### Adjustment

Concealed wrench flat adjustment with range scale

#### Shipping Weight

Approximately 3 pounds

### Ordering Sequence — Select desired option for each category

#### OPTIONS

##### Wetted Material

1 Aluminum port and piston, Teflon seal and Buna-N O-Ring

##### Adjustable Range

2 14 psig dec. to 220 psig inc. (1.0 bar dec. to 15.2 bar inc.)  
3 150 psig dec. to 1500 psig inc. (10.3 bar dec. to 103.4 bar inc.)  
6 375 psig dec. to 3000 psig inc. (25.9 bar dec. to 206.9 bar inc.)  
8 800 psig dec. to 10000 psig inc. (55.2 bar dec. to 689.5 bar inc.)

##### Electrical Form

C 15 amp at 125 or 250 VAC; ⅛ hp at 125 VAC; ¼ hp at 250 VAC;  
.5 amp resistive, .04 amp inductive at 125 VDC  
CC 11 amp, ¼ hp at 125 or 250 VAC; 5 amp resistive, 3 amp inductive at 28 VDC;  
.5 amp resistive at 125 VDC  
Z 15 amp at 125 or 250 VAC; ¼ hp at 125 VAC; ½ hp at 250 VAC; 1 amp resistive,  
.5 amp inductive at 125 VDC

##### Enclosure

3 Meets or exceeds the requirements of NEMA Type 3, 3R, 3S, 4, 4X and 13

##### Miscellaneous

A Epoxy paint exterior — extra protection for severe environments  
B Viton O-Ring  
C EPR O-Ring  
E ⅞" - 20 SAE port  
L Neon indicator light — 115 VAC  
M Gold electrical contacts for extremely low current applications  
P 5-Pin Brad Harrison connector (Reduce AC electrical rating to 8 amps)  
— (Not for CC3 Electrical)  
W Stainless steel screws — exterior  
X UL and CSA Certified with CE Mark (Not available with L or P option)


##### Special (Consult representative or factory)

- Non-catalog adjustable range and/or set point, deadband and proof pressure
- Operating temperature capability from -65°F to +400°F
- Manual reset — decreasing only (available in C3 only)
- 10 amps 125 VDC electrical rating


### Ordering Procedure

- When factory presetting is desired, stipulate set point, increasing or decreasing
- Insert available option number or letter designation as required




### Example

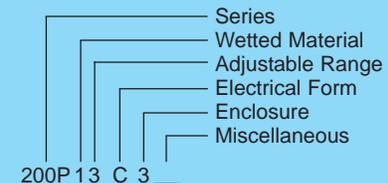

## Envelope Dimensions

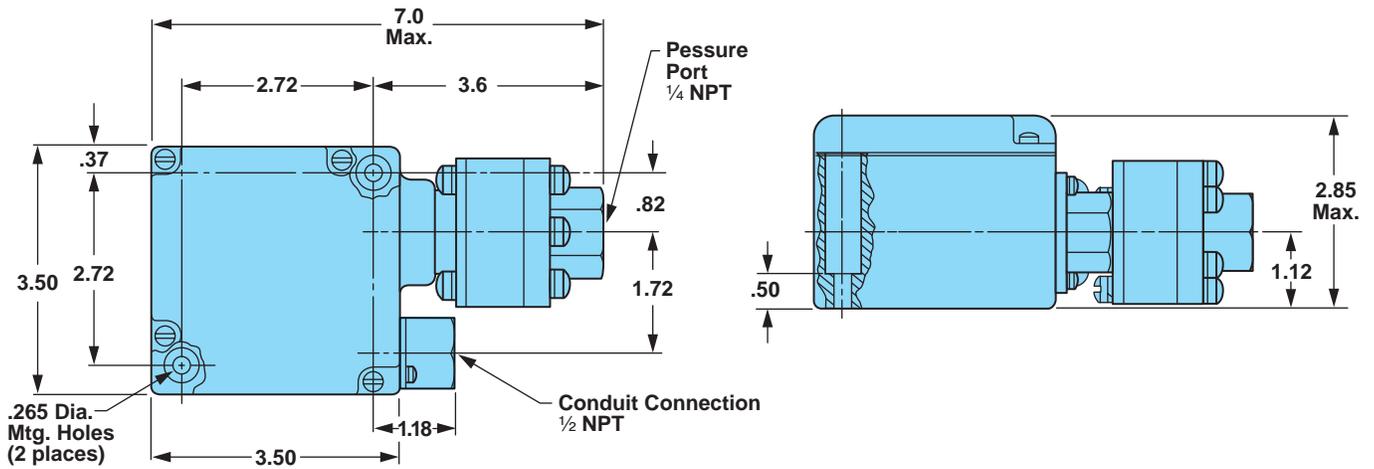

## Electrical Form

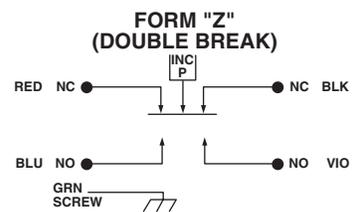

## Basic Principles of Design

