



### Explosion Proof (Division 2)

### DESCRIPTION

Sensitive Nega-Rate® Belleville spring adjustable pressure switch for low pressure applications. Unit has been designed for Division 2 explosion proof environments and is weather proof, making it suitable for all of your Division 2 applications.

### Operating Pressure Data

Adjustable Range Number	Adjustable Set Point Range		Deadband (approximate)	Maximum Recommended System Pressure	Proof Pressure
	Increasing	Decreasing			
2	10" H <sub>2</sub> O to 100" H <sub>2</sub> O	7" H <sub>2</sub> O to 97" H <sub>2</sub> O	3" H <sub>2</sub> O	300	500
4	3 to 15	2.75 to 14.75	.25*	300	500

All values given in psig (except as noted).

\*Deadband increases to .4 psi (approx.) in "CC5" configuration.

### Standard Specifications

#### Electrical

Snap action electrical switch assembly listed by Underwriters Laboratories, Inc., Factory Mutual and CSA International

#### Electrical Connection

¾ NPT female conduit connection with terminal block

#### Pressure Connection

Wetted Material 1  
¼ NPT Female

Wetted Material 4  
½ NPT Female

#### Temperature Range

Ambient:

11 amp T4 -40°F to +165°F  
(-40°C to +74°C)

5 amp T5 -40°F to +180°F  
(-40°C to +82°C)

5 amp T6 -40°F to +172°F  
(-40°C to +78°C)

M Option:

1 amp T6 -40°F to +180°F  
(-40°C to +82°C)

Media: -40°F to +300°F  
(-40°C to +149°C)

#### Adjustment

Concealed wrench flat adjustment with range scale

#### Shipping Weight

Approximately 3 pounds

### Ordering Sequence — Select desired option for each category

#### OPTIONS

##### Wetted Material

- 1 Aluminum port, Teflon coated polyimide diaphragm and Buna-N O-Ring
- 4 316 stainless steel port, Teflon coated polyimide diaphragm and Buna-N O-Ring

##### Adjustable Range

- 2 7" H<sub>2</sub>O dec. to 100" H<sub>2</sub>O inc. (17 millibar dec. to 249 millibar inc.)
- 4 2.75 psig dec. to 15 psig inc. (0.2 bar dec. to 1.0 bar inc.)

##### Electrical Form

- C 11 amp, ¼ hp at 125 or 250 VAC; 5 amp resistive, 3 amp inductive at 28 VDC; .5 amp resistive at 125 VDC
- CC 11 amp, ¼ hp at 125 or 250 VAC; 5 amp resistive, 3 amp inductive at 28 VDC; .5 amp resistive at 125 VDC

##### Enclosure

- 5 Explosion proof, hermetically-sealed electrical assembly for Division 2 Hazardous Locations, Underwriters Laboratories, Inc. listed (File E56677), CSA International certified (File LR34146)

##### Miscellaneous

- A Epoxy paint exterior — extra protection for severe environments
- B Viton O-Ring
- C EPR O-Ring
- F Fire fuse — for fire-tested equipment (Wetted Material 4 only; Not Available with G)
- G ½ NPT male port (Wetted Material 4 only)
- M Gold electrical contacts for extremely low current applications
- S Stainless steel diaphragm (Wetted Material 4 only)
- W Stainless steel screws — exterior (Standard with Wetted Material 4)


##### Special (Consult representative or factory)

- Non-catalog adjustable range and/or set point, deadband and proof pressure
- Chemical seals installed


### Ordering Procedure

- When factory presetting is desired, stipulate set point, increasing or decreasing
- Insert available option number or letter designation as required


### Example

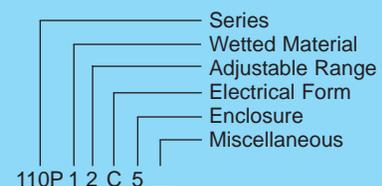

Envelope Dimensions

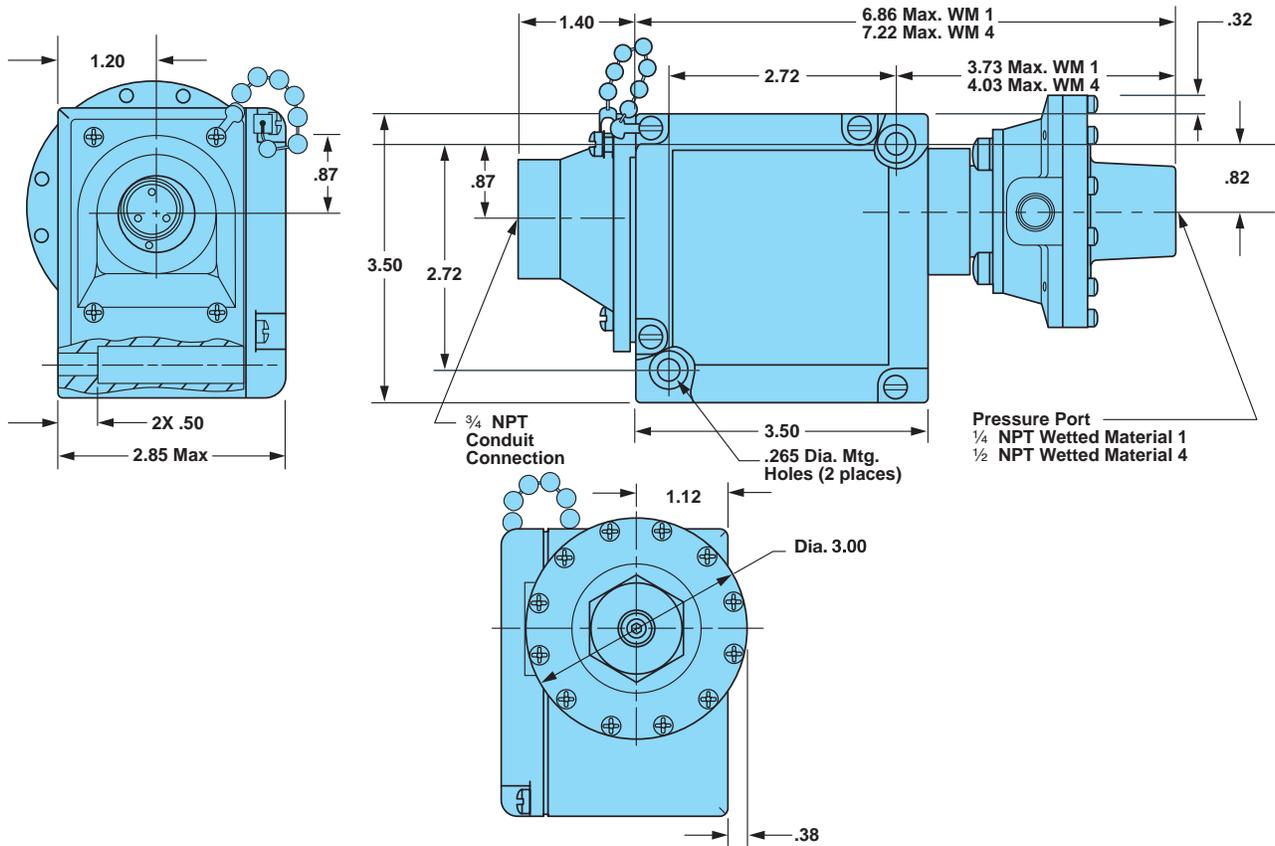

Electrical Form

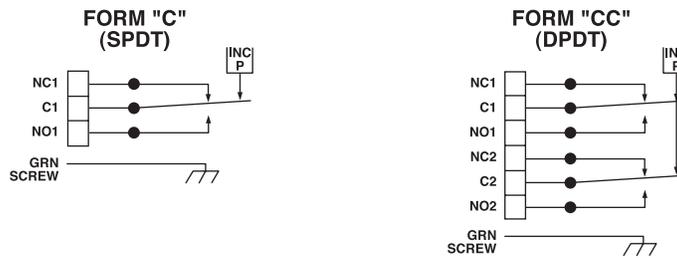

Basic Principles of Design

